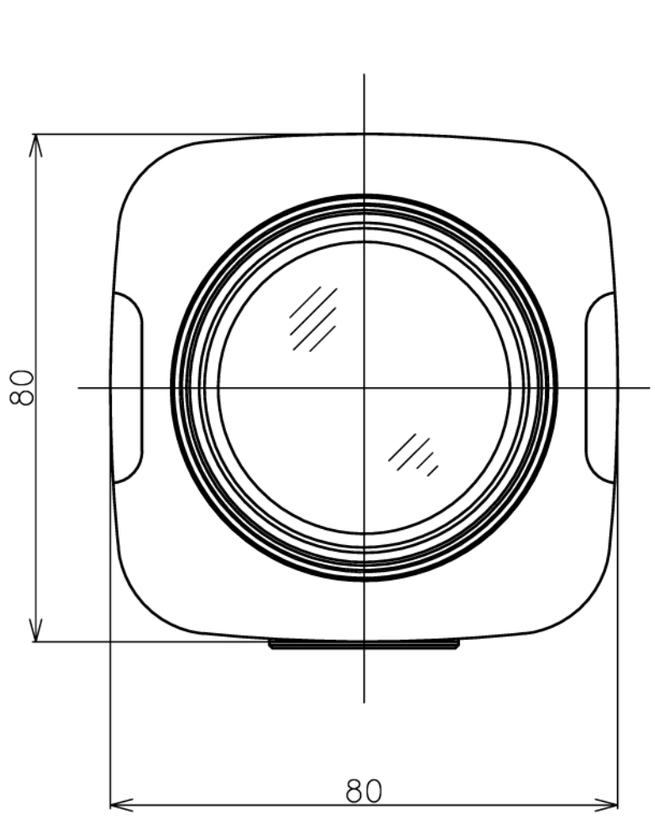

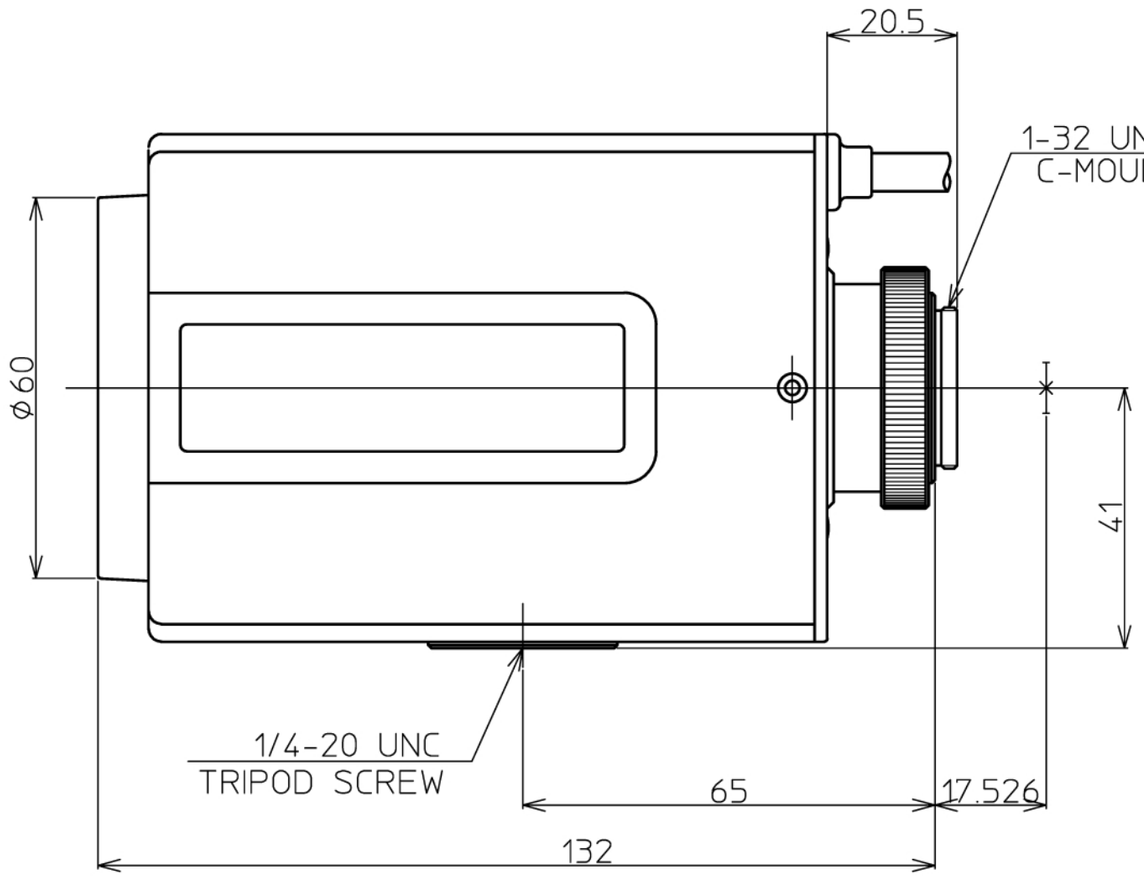

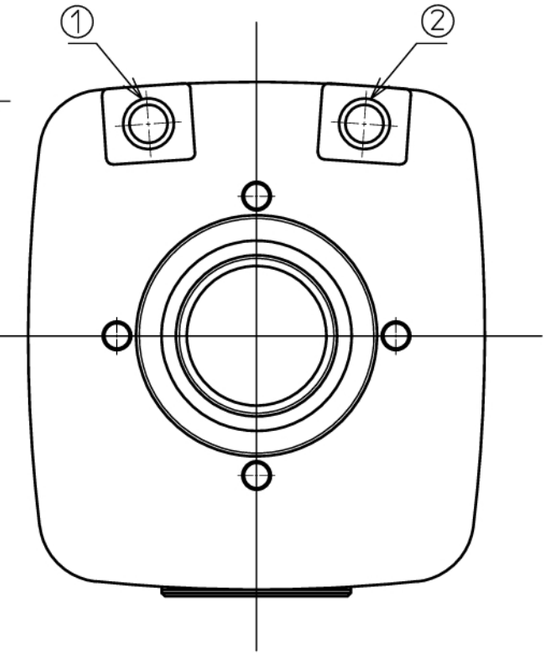

① IRIS CABLE (VIDEO CONTROL)

(+)	RED	INPUT VOLTAGE
(−)	BLACK	GROUND
	WHITE	VIDEO SIGNAL
	GREEN	REMOTE CONTROL

② MOTOR CABLE

(+)	GREEN	FOCUS NEAR
(+)	BLACK	FOCUS FAR
(+)	YELLOW	ZOOM IN
(+)	RED	ZOOM OUT



(+)	BROWN	POT. SUPPLY
	BLUE	FOCUS ERROR
(−)	WHITE	POT. RETURN
	GRAY	ZOOM ERROR

SPECIFICATION

1.	USE		FOR 1/2" COLOR ,B/W CAMERA	
2.	FOCAL LENGTH		f=7.5~127mm	
3.	IRIS RANGE		F= 1.6 ~ 360	
4.	IMAGE SIZE		ø 8 (6.4 x 4.8)	
5.	BACK FOCAL LENGTH		15.1 mm in air	
6	FLANGE FOCAL LENGTH		17.526 mm in air	
7	FOCUS RANGE		∞~ 1.5 m	
8	FIELD ANGLE	DIA.	(W) 55.8°	(T) 3.6°
		HOL.	45.6°	2.9°
		VER.	34.7°	2.2°
9.	DISTORTION (TV)		-0.78%	0.89%
10.	LENS CONSTRUCTION		13 GROUPS	16 ELEMENTS
11.	CLEAR APERTURE		FRONT ø50.0	REAR ø12.7
12.	WEIGHT		580g	

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20°C)
	COLOR	RED(+) 3pin
		BLACK 4pin
BRAKE COIL	RESISTOR	1150Ω (20°C)
	COLOR	YELLOW(+) 2pin
		GREEN 1pin
DRIVE VOLT.	OPEN	+4V
	CLOSE	0V
		W/CLOSING SPRING



Kowa

尺度	1/1	承認 八木	製図 富永
機種名	LMZ7527AMPDC		
機種番	1/2" F1.6 f7.5-128mm		